

 **MWE**
Stainless Steel Manufacturer
NORTH AMERICA

TWIN
ST.1011.TW



Find A Dealer Online At
www.mwe-na.com



TWIN ST.1011.TW

The Twin sliding door system was designed specifically to mount on the ceiling. The 2 wheels arranged vertically give a unique look that can carry up to 297 pounds of 1/2" glass! The ceiling mounts can be ordered as fixed or adjustable to allow for on-site percision.

Technische Details:

Download technical drawings and generate specifications online using



Overview

- + Suitable for Wood or Glass
- + Mounts to the ceiling
- + Can accommodate up to 1/2" glass or 2-3/4" wood panels
- + Solid Stainless Steel Rail
- + Can carry 297 pounds





Find A Dealer Online At
www.mwe-na.com

Technical Highlights



By turning the plastic sleeve you can adjust the mount height +/- 15 cm

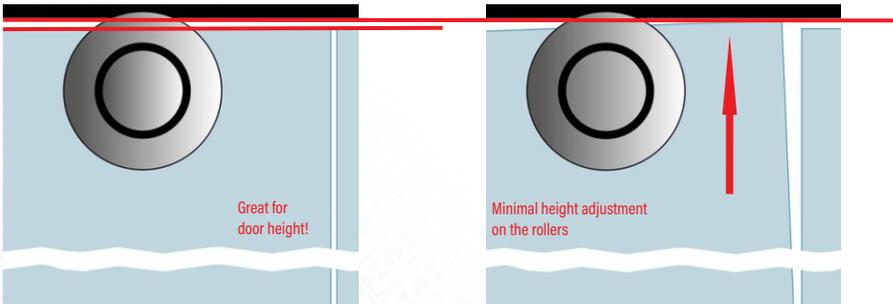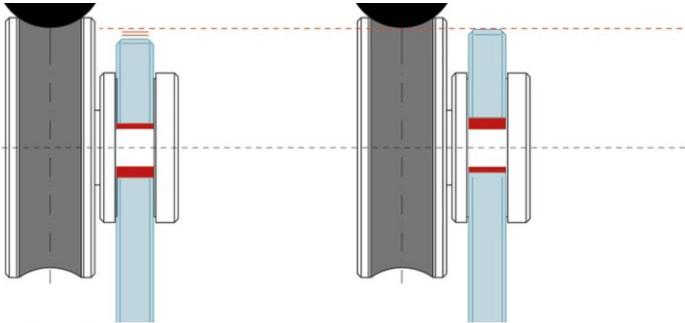

SLIDING RAILS ARE MADE OF SOLID STAINLESS STEEL

- + Very quiet movement and zero resistance while sliding
- + High load capacity of the entire system



Find A Dealer Online At
www.mwe-na.com

ST.2000 Round Rail $\varnothing 1''$

ST.2050 Set of 3 Mounting Rosettes - 1/2"

ST.5001 Ceiling Mount with Height Adjustment

ST.5003 Ceiling Mount w/out Height Adjustment

*only edge polished!

Alternative ceiling mount with $\varnothing 2.3''$ available

For single round rails

For single round rails

+/- 1/4" height adjustment possible after installation

ST.3600 Round Rail $\varnothing 1''$ **MWE-Soft-Stop-Module**

Warning:

- + Max. door leaf weight 220 lbs.
- + Minimum width of door leaf leaves 0.4"
- + Cover plate is made of aluminum

ST.2090.V Corner Connector

ST.2025 Seamless Rail Connector

ST.5035 Mount For Front Mounted Hardware

Für $\varnothing 25$ mm Laufschiene

With Angle Adjustment

ST.2100 Wall Mounts For Round Rails

Plan Wall Distance: 0.68"-2" possible, in 2" increments

Standard Wall Distance: 0.68" (17.5mm) included

ST.2174 Glass Mounts - Double Rails

Plan Wall Distance: 3/4"-2" possible

Standard Wall Distance: 3/4" (18mm) included

ST.2170 Glass Mounts For Rails

Plan Wall Distance: 3/4"-2" possible

Standard Wall Distance: 3/4" (18mm) included

Different wall spacers to compensate for baseboards or frames.

Standard/Default wall distance is 0.68" (17.5 mm)

0.68" 17.5 mm

0.88" 22.5 mm

1.08" 27.5 mm

1.27" 32.5 mm

1.47" 37.5 mm

1.67" 42.5 mm

1.87" 47.5 mm

2" 52.5 mm


Wall Mounting Screws

Standard Wall Mounting (Included) Available in 4" or 4.7" lengths

Precision drilling provides "double drill" allowing for the screw to be recessed into the rail

Technische Details:
Download technical drawings and generate specifications online using
ARCAT

Find A Dealer Online At
www.mwe-na.com

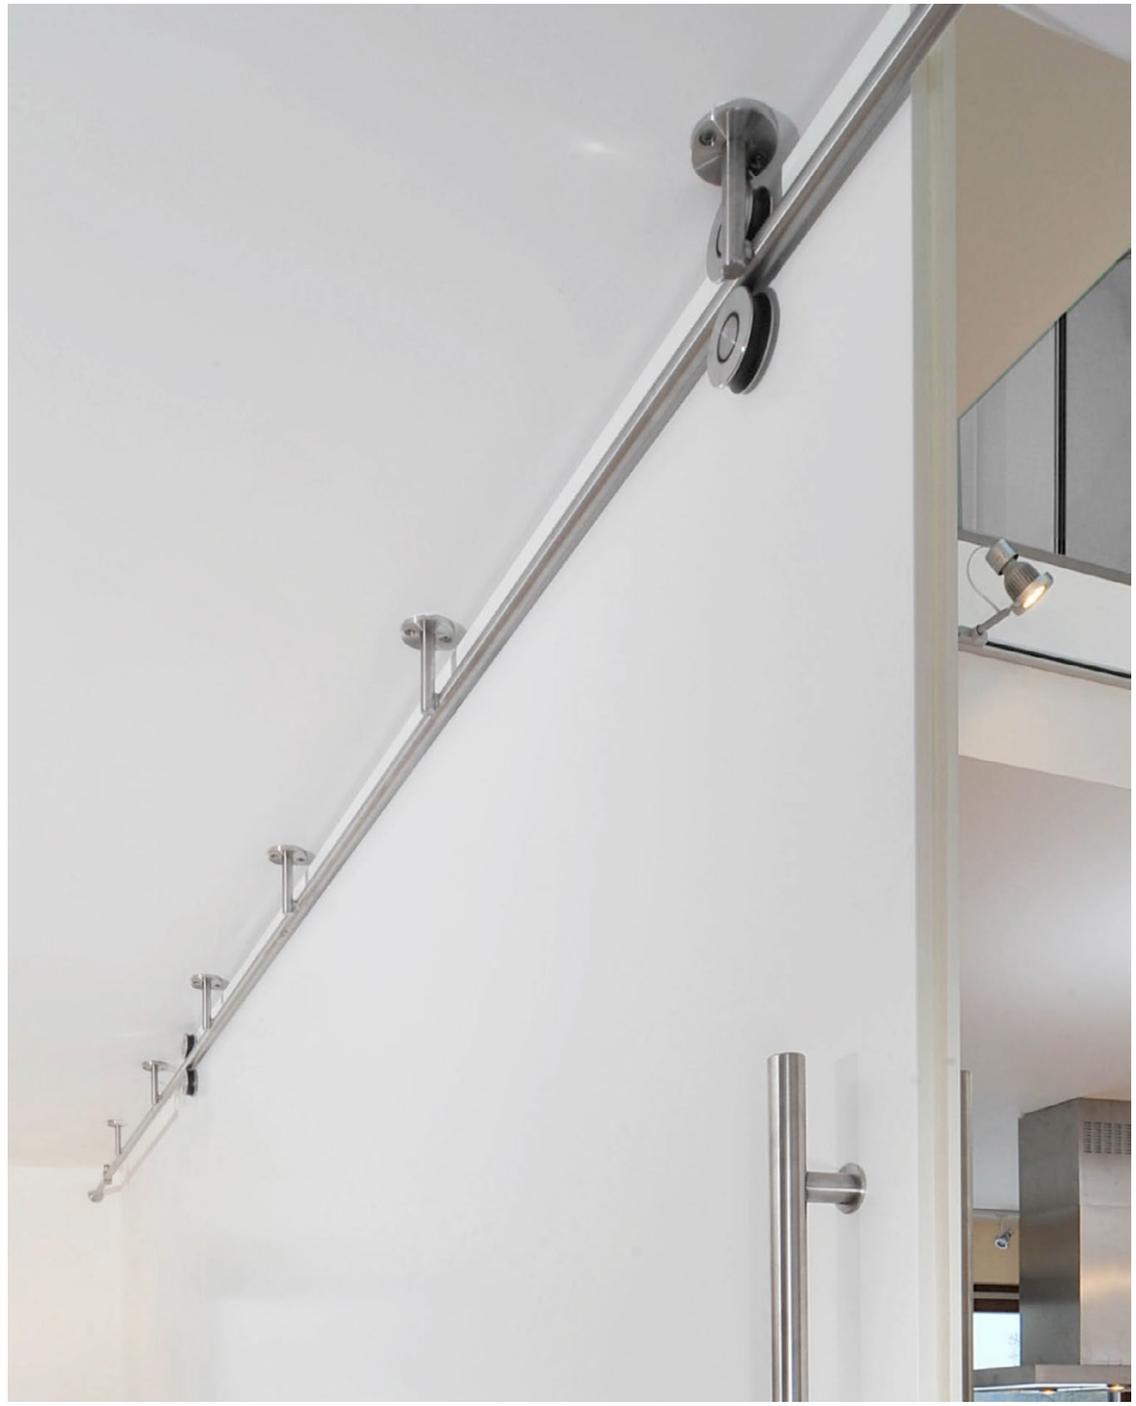

Find A Dealer Online At
www.mwe-na.com